

40 tm
NEW AGE



RADIOCONTROL


9405C

9445C

Ferrari

PASSION FOR LIFTING

9405C - 9445C Technical data

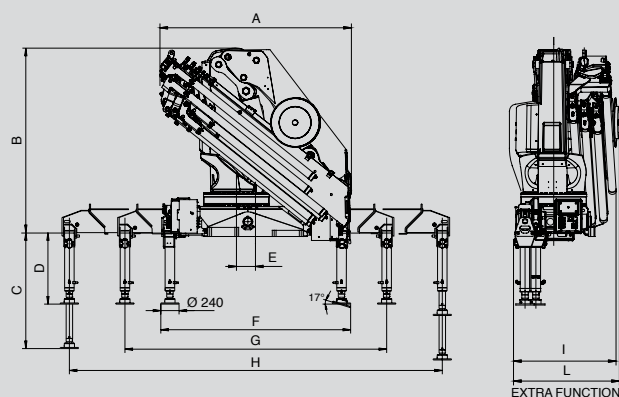


	A2	A3	A4	A5	A6	A7	A8	A6J5
A	2160	2275	2375	2470	2510	2510	2510	2510
B	2465	2465	2465	2465	2465	2465	2465	2780
C	1481	1481	1481	1481	1481	1481	1481	1481
D	895	895	895	895	895	895	895	895
E	249	249	249	249	249	249	249	249
F	2500	2500	2500	2500	2500	2500	2500	2500
G	6000	6000	6000	6000	6000	6000	6000	6000
H	7800	7800	7800	7800	7800	7800	7800	7800
I	1210	1240	1240	1240	1240	1345	1345	1300
L	1355	1355	1355	1355	1355	1390	1390	-

A2	kg 11845*	7895	5695	4325	3255	2525	1965	1550	9405C
	m 2,95	4,40	6,07	7,97	10,05	12,10	14,25	16,35	
	kg 12810*	8565	6170	4695	3495	2725	2130	1695	9445C
	m 2,95	4,40	6,07	7,97	10,05	12,10	14,25	16,35	
A3	kg 11540*	7630	5440	4095	3255	2525	1965	1550	9405C
	m 2,95	4,45	6,15	8,05	10,05	12,1	14,25	16,35	
	kg 12355*	8170	5835	4385	3495	2725	2130	1695	9445C
	m 2,95	4,45	6,15	8,05	10,05	12,1	14,25	16,35	
A4	kg 11355*	7400	5230	3880	3055	2525	1965	1550	9405C
	m 2,95	4,50	6,17	8,1	10,1	12,10	14,25	16,35	
	kg 12080*	7905	5605	4175	3285	2725	2130	1695	9445C
	m 2,95	4,50	6,17	8,1	10,1	12,10	14,25	16,35	
A5	kg 11060*	7105	4995	3670	2840	2320	1965	1550	9405C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	
	kg 11845*	7620	5370	3960	3080	2520	2130	1695	9445C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	
A6	kg 10870*	6965	4835	3510	2680	2155	1790	1550	9405C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	
	kg 11650*	7470	5220	3795	2910	2345	1965	1695	9445C
	m 2,95	4,58	6,25	8,15	10,15	12,15	14,25	16,35	
A7	kg 10675*	6615	4585	3295	2490	1975	1625	1375	9405C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	
	kg 11440*	7100	4950	3580	2720	2170	1785	1520	9445C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	
A8	kg 10525*	6525	4450	3155	2350	1835	1475	1230	9405C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	
	kg 11225*	6970	4785	3440	2580	2025	1645	1375	9445C
	m 2,95	4,75	6,45	8,35	10,35	12,35	14,45	16,55	
A6 J5	kg 560	485	430	390	360	330	260		9405C
	m 19,25	20,95	22,65	24,45	26,15	27,95	29,95		
	kg 670	580	515	460	420	380	300		9445C
	m 19,25	20,95	22,65	24,45	26,15	27,95	29,95		

*Theoretical lifting capacity

Other Jib version also available.
Contact us for detailed information



Recommended truck:
9405C - G.V.W. ton 32
9445C - G.V.W. ton 32

	Lifting Moment	Swing Angle	Working pressure	Oil tank capacity	Max Oil flow	Max lifting height	Standard crane weight
	tm	°	bar	l	l/min	m	kg
9405C							
A2	34,7	endless	325	230	100	20,3	4100
A3	34,0	endless	325	230	100	22,6	4330
A4	33,3	endless	325	230	100	24,8	4550
A5	32,5	endless	325	230	100	27,0	4760
A6	31,9	endless	325	230	100	28,9	4950
A7	31,4	endless	325	230	100	28,9	5130
A8	31,0	endless	325	230	100	28,9	5300
A6J5	-	endless	325	230	100	33,8	5700
9445C							
A2	38,4	endless	345	230	100	20,3	4270
A3	37,1	endless	345	230	100	22,6	4500
A4	36,3	endless	345	230	100	24,8	4720
A5	35,6	endless	345	230	100	27,0	4930
A6	34,9	endless	345	230	100	28,9	5120
A7	34,4	endless	345	230	100	28,9	5300
A8	33,7	endless	345	230	100	28,9	5470
A6J5	12,9	endless	325	230	100	33,8	5870

Standard

Designed in accordance with EN12999

Design class: HC1-HD4 for model 9405C

Design class: HC1-HD5 for model 9445C

- Multifunctional radio remote control HETRONIC
- Sauer Danfoss PVG32
- Flanged valves
- Hydraulically extendable stabilizers
- Swivel stabilizer foot
- Stabilizers control valve
- Internal stabilizers pipes
- Centralized greasing system
- EQS Extension Quick System
- SDV Smooth Descent Valve
- Red Power
- P-PB Proportional Power Boost (9445C)
- F3XL Crane control system (CE)



F.lli FERRARI

Via Einstein, 8
42028 Poviglio (RE) Italy
Tel. +39 0522/486308
Fax +39 0522/486330
info@flliferrari.it
marketing@flliferrari.it
www.flliferrari.com



Quality and environmental
certified

Dealer

Data, descriptions, and illustrations pertain only and uniquely to models sold at the time of printing of this brochure. After the date of printing, this information is purely indicative and not binding upon F.lli Ferrari. Future modifications are solely at the discretion of F.lli Ferrari and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, contact the manufacturer or your reseller. Cranes manufactured and/or marketed by F.lli Ferrari.